



MS280 MULTISPIRAL HYDRAULIC HOSE- DIN-EN 856 R12

FOR HYDRAULIC SYSTEM SERVICE WITH PETROLEUM AND WATER BASE FLUIDS,
FOR GENERAL INDUSTRIAL SERVICE.

应用范围: 一般工业用的 "石油基液" 或 "水乙二醇基" 液压油

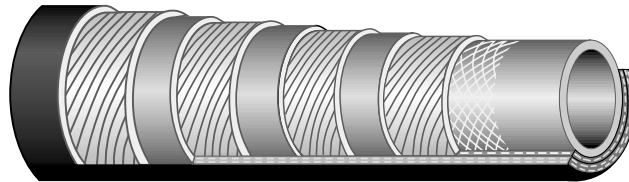

- Tube** : Hydraulic fluids on mineral, vegetable oil and glycol basis resistant special synthetic neoprene rubber.
胶管 : 合成橡胶内管
- Reinforcement** : 4 high tensile steel spirals wire reinforcement.
强化层 : 四层钢丝缠绕强化层
- Cover** : Hydraulic oil, abrasion and weather resistant wrapped synthetic rubber.
外皮 : 合成橡胶外皮
- Temperature** : -40°C to + 100°C or -40°F to + 212°F
温度
- Branding** :  MS280-(size) DIN-EN 856 R12 W.P.() PSI B.P.() PSI I.D.() INCH MSHA().
标记
- Brand Type** : Bright orange negative branding on black wrapped cover.
类型

Flame Resistance : U.S. MSHA Approved Cold Resistance: -55°C High Temperature: +135°C

PRODUCT CODE	I. D.		O. D.	W. P.		B. P. THEORETICAL		BR	W	L
	(IN)	(MM)	(MM)	(BARI)	(PSI)	(BARI)	(PSI)	mm	gr/mt	mt
MS280-06	3/8	9.5	20.4	276	4000	1104	16000	127	631	40
MS280-08	1/2	12.7	23.8	276	4000	1104	16000	178	789	40
MS280-10	5/8	16	27.4	276	4000	1104	16000	205	1050	40
MS280-12	3/4	19	30.7	276	4000	1104	16000	241	1230	40
MS280-16	1	25.4	38.0	276	4000	1104	16000	305	1880	40
MS280-20	1 1/4	31.8	47.0	207	3000	828	12000	419	2688	40
MS280-24	1 1/2	38.1	53.5	172	2500	688	10000	508	3400	40
MS280-32	2	51	66.7	172	2500	688	10000	635	4400	40


* Other sizes are available on request.


Due to continual product improvements, UNI-FLEX™ reserves the right to alter specs without prior notice.

MS99 MULTISPIRAL HYDRAULIC HOSE - DIN-EN 856 4 SP/R9R

FOR HIGH PRESSURE HYDRAULIC SYSTEMS WITH PETROLEUM AND WATER-GLYCOL BASE FLUIDS, FOR LUBRICATING OILS AND WATER.

应用范围: 以 "石油基液" 和 "水乙二醇基" 为基本流体的高压系统: 润滑油和水。

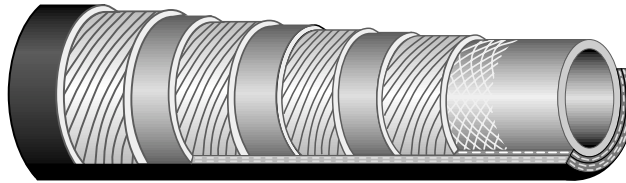

- Tube** : Hydraulic fluids on mineral, vegetable oil and glycol basis resistant special synthetic neoprene rubber.
胶管 : 合成橡胶内管
- Reinforcement** : 4 high tensile steel spirals wire reinforcement.
强化层 : 四层缠绕钢丝强化层
- Cover** : Hydraulic oil, abrasion and weather resistant wrapped synthetic rubber.
外皮 : 合成橡胶外皮
- Temperature** : -40°C to + 100°C or -40°F to + 212°F
温度 :
- Branding** :  MS99-(size) DIN 20023/EN 856-4 SP W.P.() PSI B.P.()PSI I.D.()INCH MSHA()
标记 :
- Brand Type** : Yellow negative branding on black wrapped cover.
类型 :

Flame Resistance : U.S. MSHA Approved Cold Resistance: -55°C High Temperature: +135°C

PRODUCT CODE	I. D.		O. D.	W. P.		B. P. THEORETICAL		BR	W	L
	(IN)	(MM)	(MM)	(BARI)	(PSI)	(BARI)	(PSI)	mm	gr/mt	mt
MS99-06	3/8	9.5	21.4	445	6453	1780	25810	180	850	40
MS99-08	1/2	12.7	24.6	415	6018	1660	24070	230	950	40
MS99-10	5/8	16	28.5	350	5075	1400	20300	250	1140	40
MS99-12	3/4	19	31.5	350	5075	1400	20300	300	1485	40
MS99-16	1	25.4	39.7	280	4060	1120	16240	340	2057	40
MS99-20	1 1/4	31.8	50.8	210	3045	840	12180	460	3218	40
MS99-24	1 1/2	38.1	57.2	185	2683	740	10730	560	3741	40
MS99-32	2	50.8	69.8	175	2538	700	10150	660	4500	40

* Other sizes are available on request.

Due to continual product improvements, UNI-FLEX™ reserves the right to alter specs without prior notice.