



POWER STEERING HOSE - SAE J 188A2

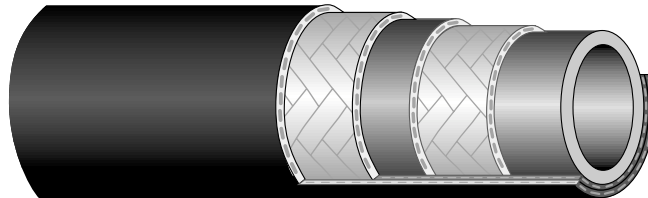

- Tube** : Black, hypalon blend resistant to transmission fluids.
- Reinforcement** : Two high tensile nylon reinforcement.
- Cover** : Oil, abrasion and weather resistant.
- Temperature** : -40°C to +150°C
- Branding** :  POWER STEERING HOSE SAE J 188A2 W.P. 1500PSI B.P. 6000PSI I.D. (SIZE) INCH.
- Branding Type** : White positive branding on black wrapped cover.

PRODUCT CODE	I. D.		O. D.		W. P.	B. P. THEORETICAL
	(IN)	(MM)	(IN)	(MM)	(PSI)	(PSI)
PS1500	3/8	9.5	0.80	20	1500	6000


* Other sizes are available on request.


Due to continual product improvements, FIT-FLEX™ reserves the right to alter specs without prior notice.

HYDRAULIC BRAKE HOSE - SAE J 1401



FOR HYDRAULIC BRAKE FLUID APPLICATION

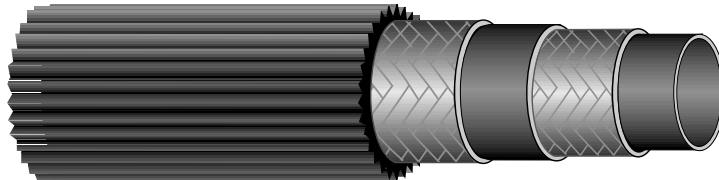

- Tube** : Hydraulic brake fluid resistant special synthetic rubber.
- Reinforcement** : High tensile synthetic textile.
- Cover** : Abrasion, ozone, ageing, oil and weather resistant special synthetic rubber.
- Temperature** : -45°C to +80°C
- Branding** :  HYDRAULIC BRAKE HOSE SAE J 1401 I.D. (SIZE) INCH
W.P. 4002 PSI DOT/US FMVSS 106.
- Branding Type** : White positive branding on black cover.

PRODUCT CODE	I. D.		O. D.		W. P.	B. P. THEORETICAL
	(IN)	(MM)	(IN)	(MM)	(PSI)	(PSI)
BRAKE HOSE	1/8	3.2	0.413	10.5	4002	7105
BRAKE HOSE	3/16	5	0.512	13	4002	5003

* Other sizes are available on request.

Due to continual product improvements, FIT-FLEX™ reserves the right to alter specs without prior notice.